
amphion create



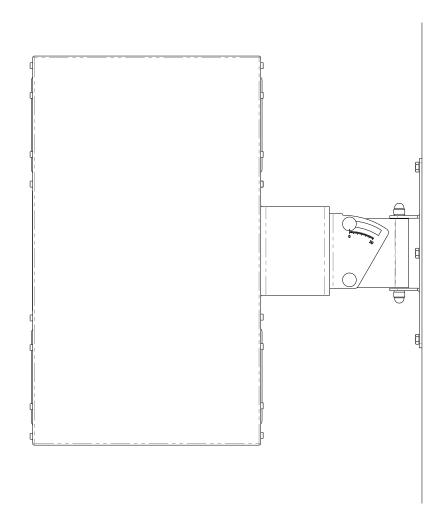

Amphion Loudspeakers


Wall-Mount Bracket Assembly Instructions

IMPORTANT NOTES:


Please first refer to the Ceiling/Wall-Mount Product Sheet for your monitor or speaker model here:

Pro-Audio "Create" Line https://amphion.fi/create/support-pro-audio/product-information/ **Home Audio "Enjoy" Line** https://amphion.fi/enjoy/support-home-audio/product-information/


- See your local Distributor or Dealer for specific information on Price | Parts | Installation
- This mount-system is a combination of an Amphion adaptor and a 3rd-Party ceiling/wall mount
- Amphion recommends that a professional installer or qualified tradesperson install this system
- This booklet is a general guide only. A technical sheet is available to Dealers/Distributors/Installers

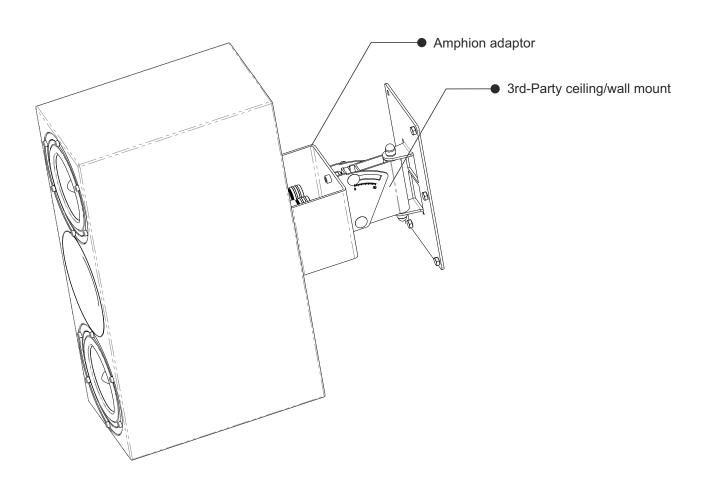


Components & Fasteners

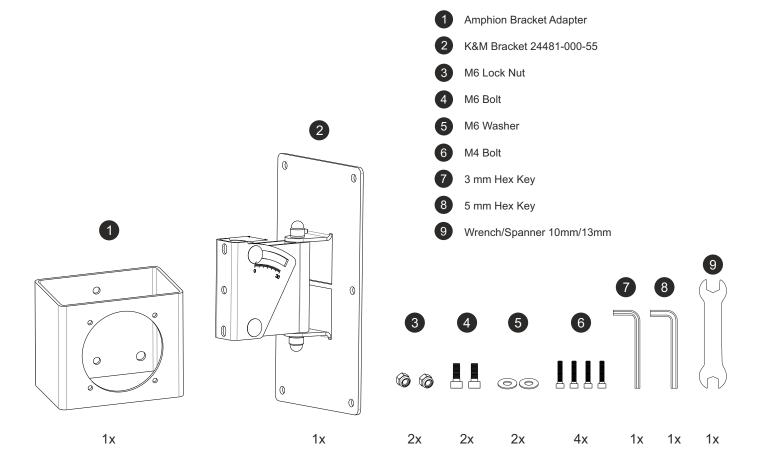


Amphion Adaptor & K&M Mount Dimensions (mm)

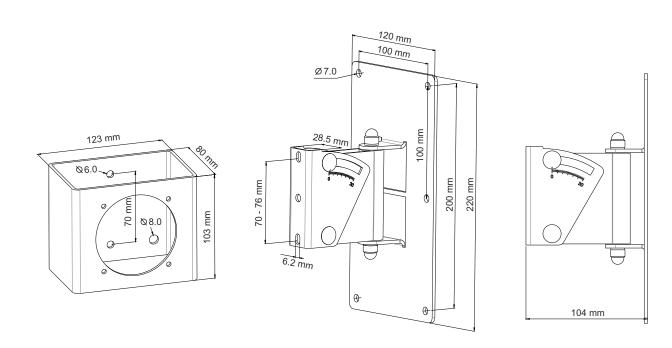



Remove connection-post screws (4 screws)

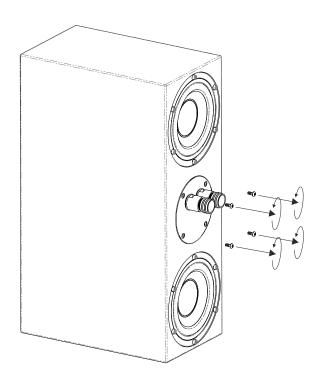

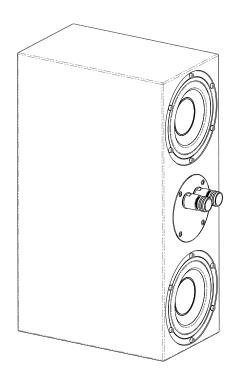


2 Position adaptor bracket and affix (4 screws)

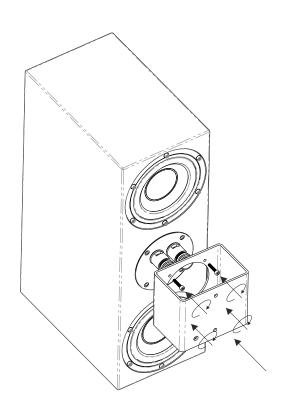


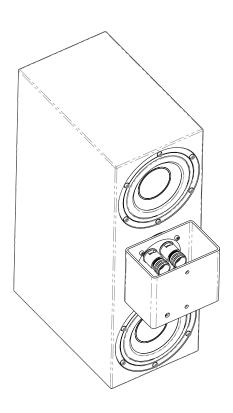


(3) Affix wall-mount plate to wall using 6 x mounting bolts

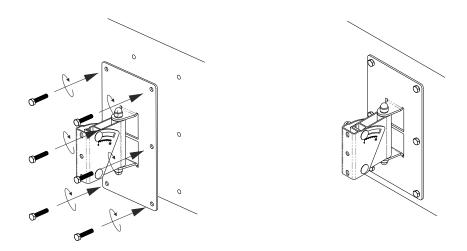


(4) Remove adjustable U-bracket from wall-mount ie. bolts (2), washers (2), locknuts (2), and locknut cap (2)




(5) Attach adjustable U-bracket to speaker adaptor-bracket using bolts (2), washers (2), and locknuts (2)

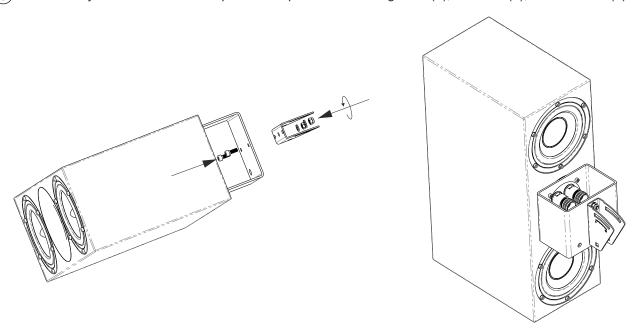


6 Slide speaker with mounting-assembly into place over wall-mount

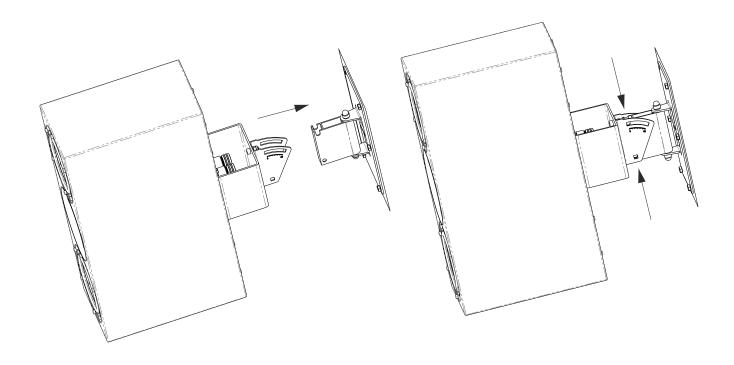


(7) Insert bolts (2), washers (2), locknuts (2), and locknut caps (2) to fasten adjustable U-bracket to wall-mount

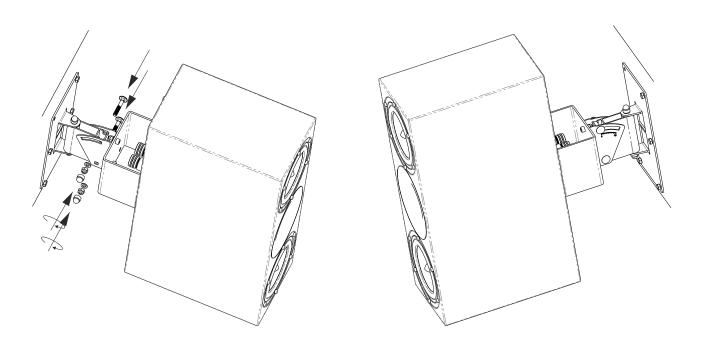

8 Set desired monitor tilt-angle (eg. 30 degrees pictured) and tighten adjustable hinge bolts

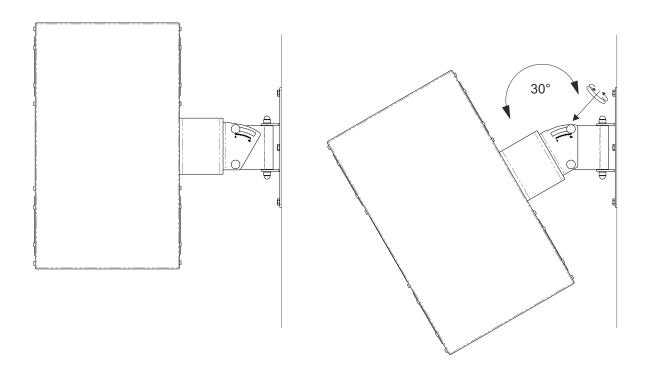

9 Adjust lateral monitor toe-in angle accordingly

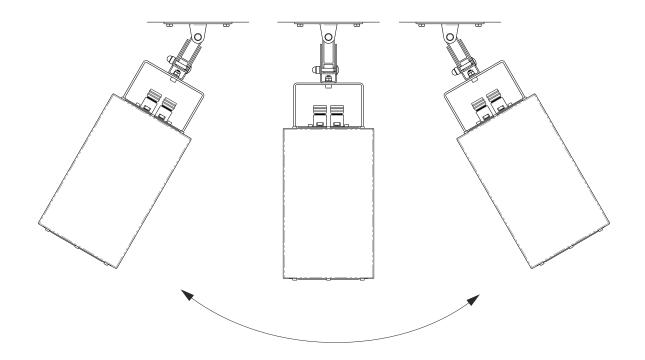



Assembly Instruction

Version: 1.1 / 01.12.2021

Amphion Loudspeakers Ltd.

Factory & Headquarters
Kiveläntie 4
70460 Kuopio
Finland
Tel. +358 17 2882 100
info@amphion.fi
amphion.fi