

## **Amphion Loudspeakers**


Ceiling Bracket Assembly Instructions

## IMPORTANT NOTES:


- ❗ Please first refer to the Ceiling/Wall-Mount Product Sheet for your monitor or speaker model here:

**Pro-Audio "Create" Line**    <https://amphion.fi/create/support-pro-audio/product-information/>  
**Home Audio "Enjoy" Line**    <https://amphion.fi/enjoy/support-home-audio/product-information/>


- ❗ See your local Distributor or Dealer for specific information on Price | Parts | Installation
- ❗ This mount-system is a combination of an Amphion adaptor and a 3rd-Party ceiling/wall mount
- ❗ Amphion recommends that a professional installer or qualified tradesperson install this system
- ❗ This booklet is a general guide only. A technical sheet is available to Dealers/Distributors/Installers

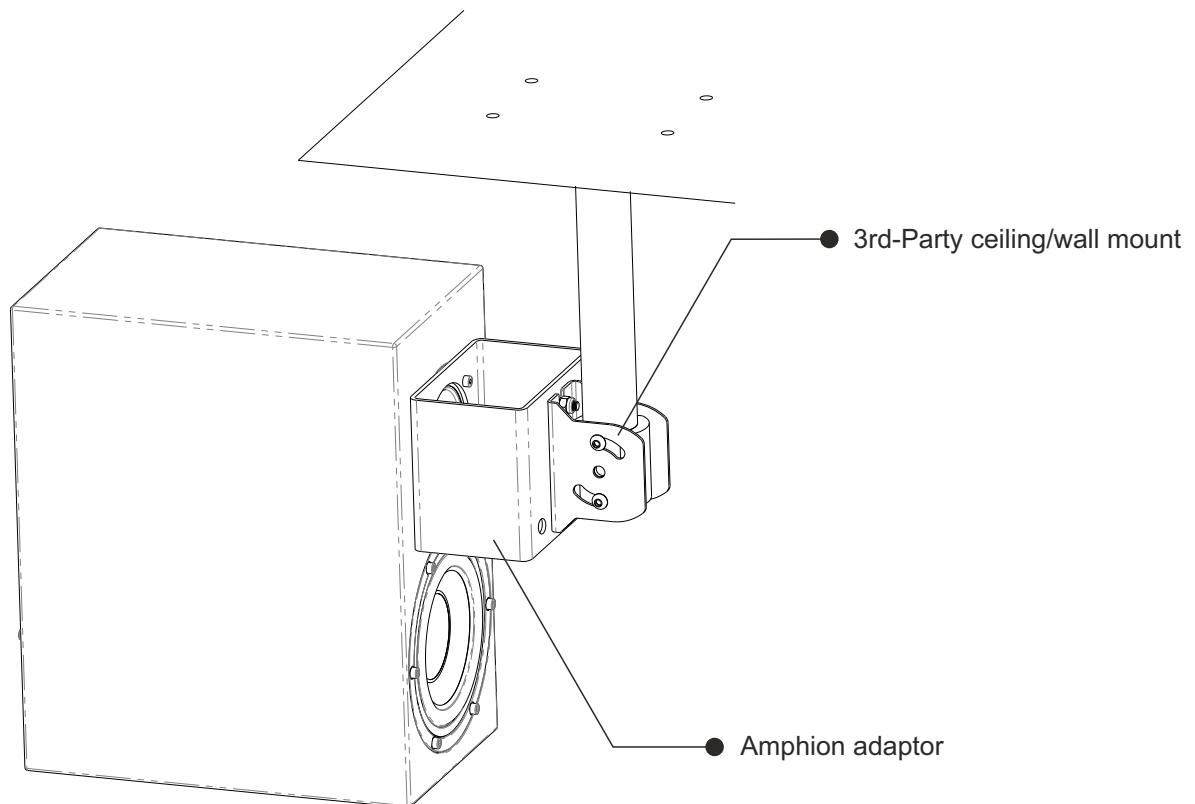



## Components & Fasteners

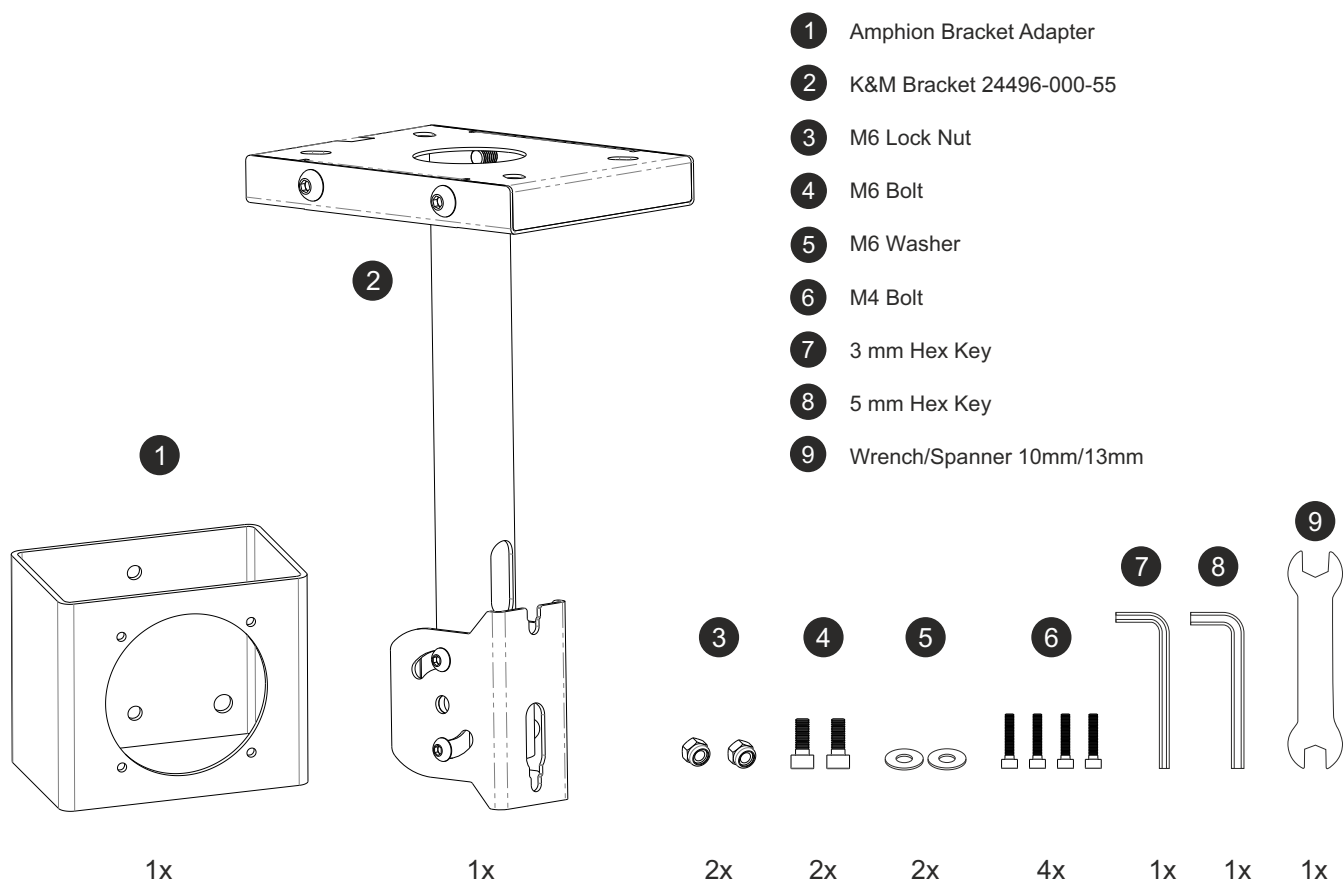



## Amphon Adaptor & K&M Mount Dimensions (mm)

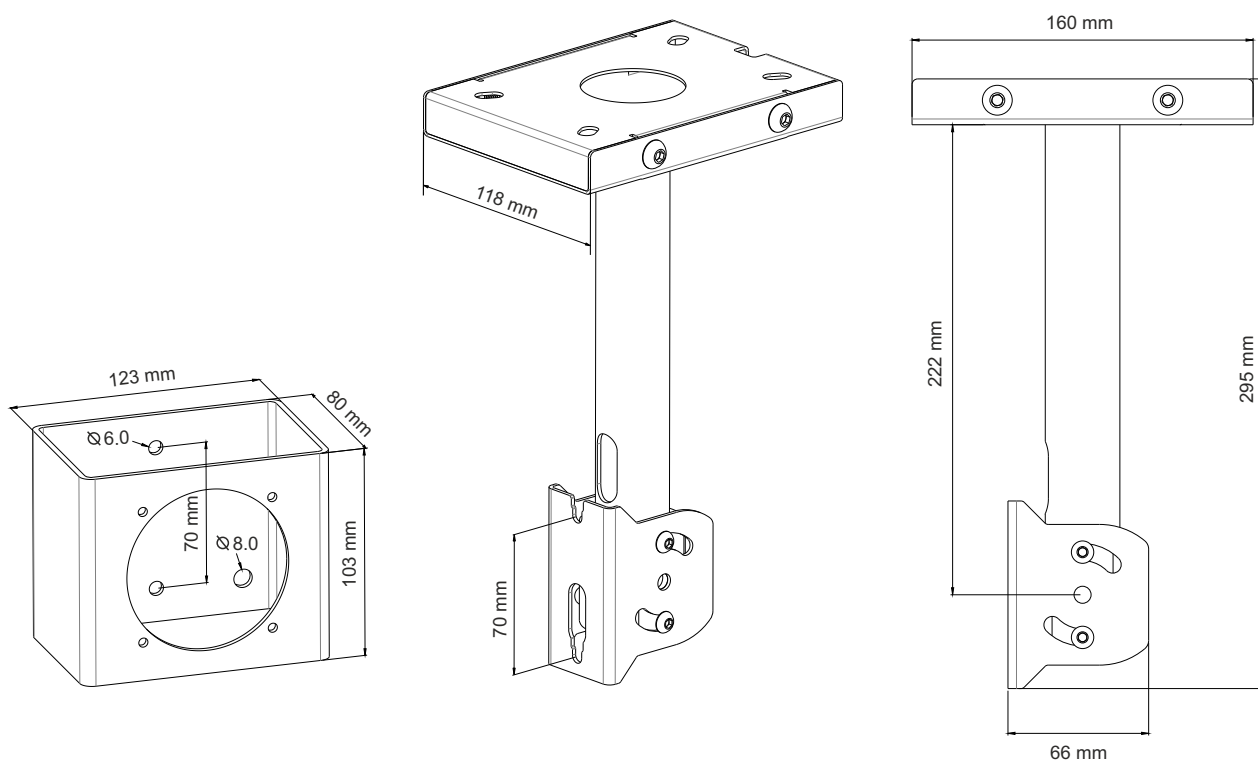



- ① Remove connection-post screws (4 screws)

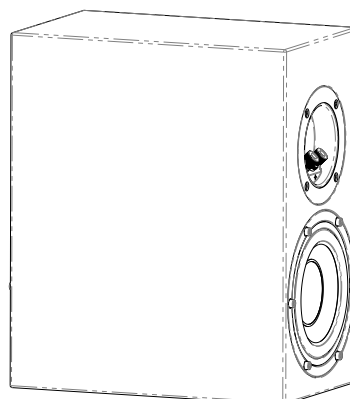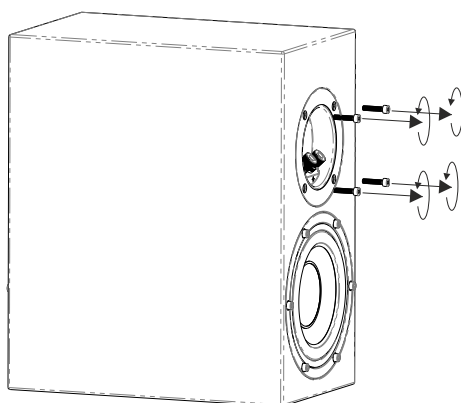


- ② Position adaptor bracket and affix (4 screws)

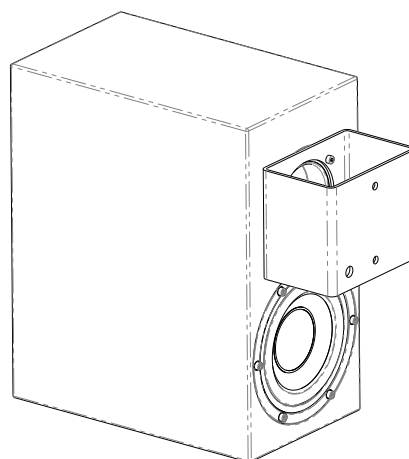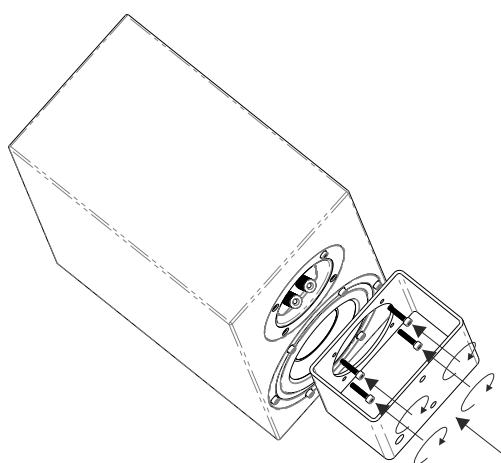


- ③ Loosely fit M6 bolts (2), M6 washers (2) and M6 locking nuts (2) to adaptor bracket

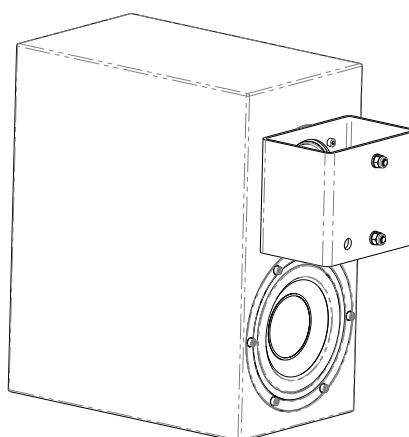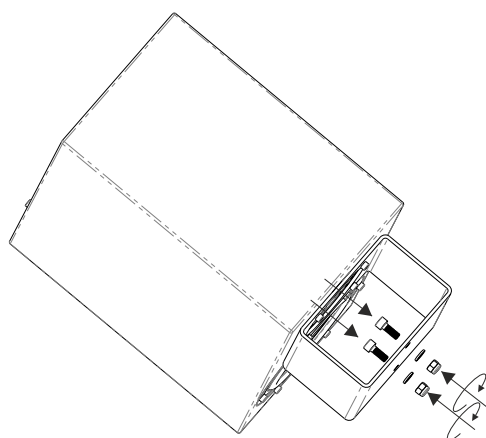


- ④ Mount base-plate of K&M bracket to pre-drilled/tapped ceiling panel with M4 bolts (4 bolts) and M6 washers (4)

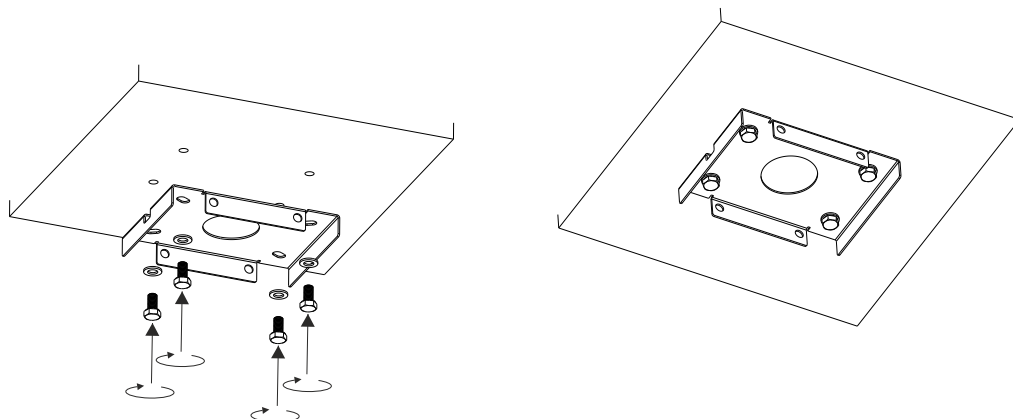


- ⑤ Re-assemble mounting-post to base-plate with original bolts (4)

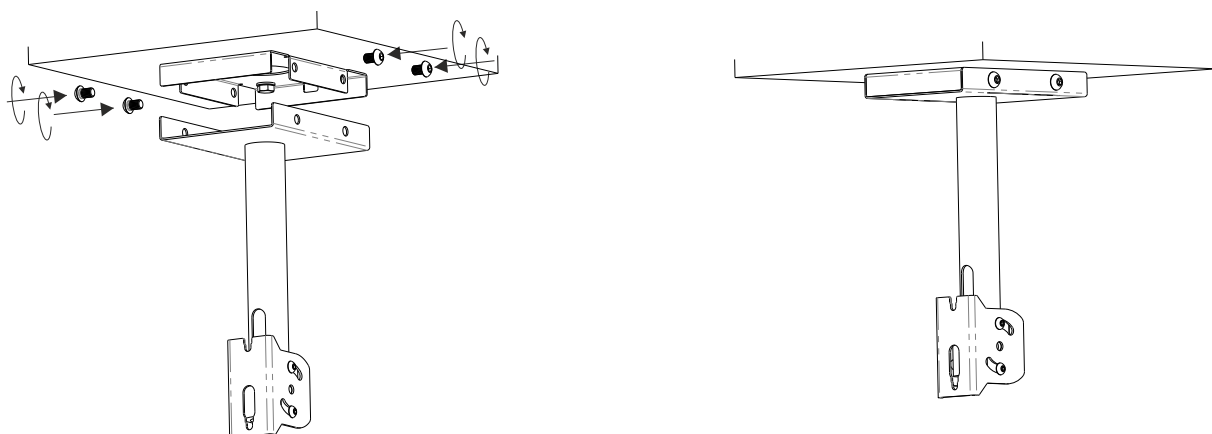


- ⑥ Slot lower mounting-post bracket to M6 bolts (2) on adaptor bracket and tighten

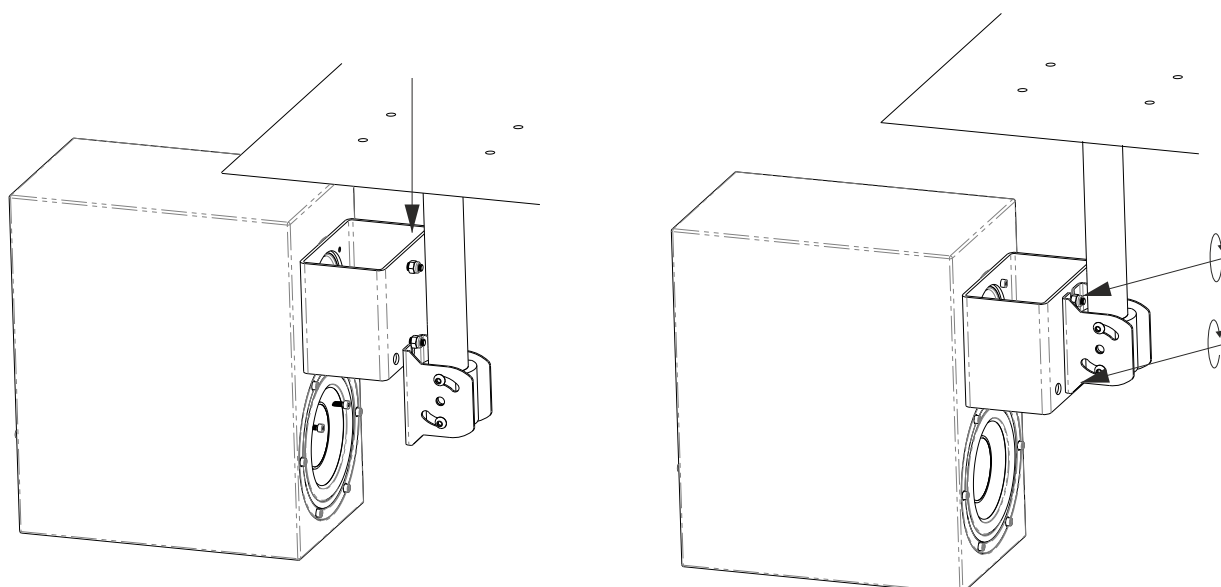

- ⑦ Set desired monitor tilt-angle (eg. 45 degrees pictured) and tighten adjustable hinge bolts

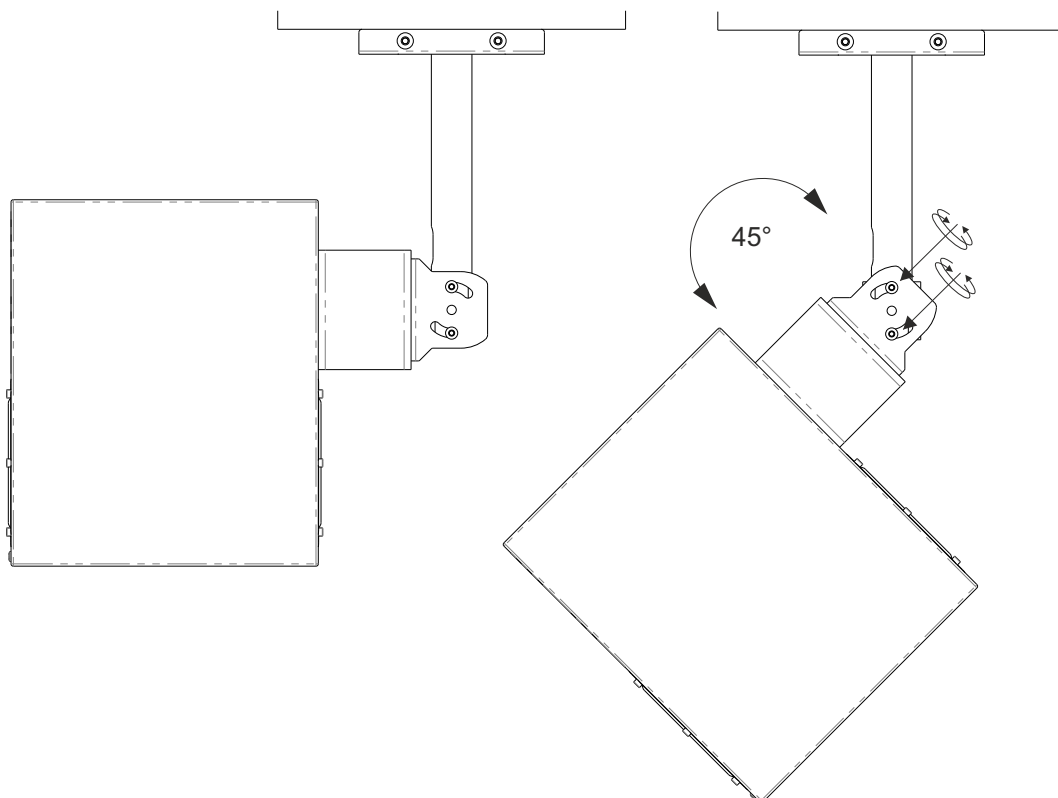

- ⑧ Adjust lateral monitor toe-in angle accordingly

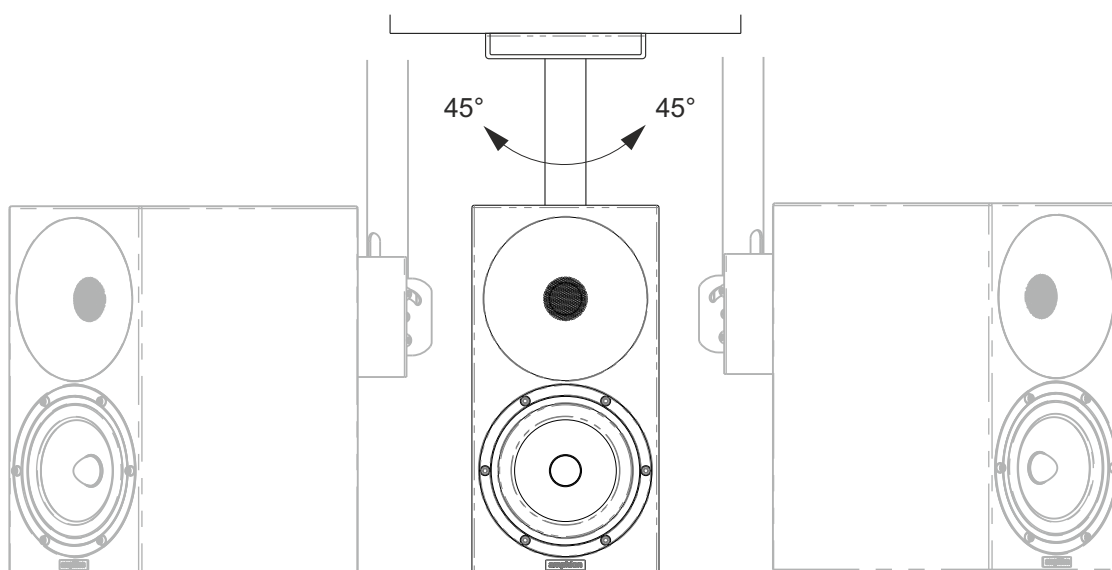



## **Assembly Instruction**

Version: 1.1 / 01.12.2021

### **Amphion Loudspeakers Ltd.**

Factory & Headquarters

Kiveläntie 4

70460 Kuopio

Finland

Tel. +358 17 2882 100

[info@amphion.fi](mailto:info@amphion.fi)

[amphion.fi](http://amphion.fi)